



SRH-SH Spring Rubber Mount (Deflection : 5.5mm)

■ Features



It is used as a sliding shoe on the pipe and installed using pipe clip & bolt. The allowed range of support spacing for horizontal pipe is from 2.0m to 5.0m. And the model changes depending on the support spacing.



SRH-A TYPE

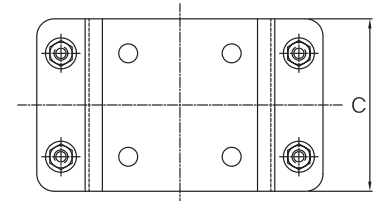

SRH-B TYPE

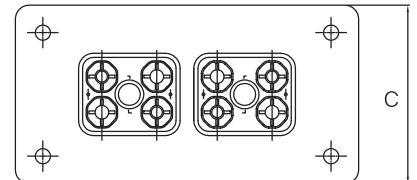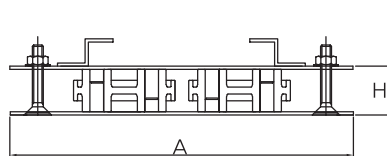

■ SRH-A TYPE Dimension & Selection Guide

Pipe Diameter	SRP	A	B	C	H
Φ50	A(100,200)	166	80	100	40
Φ65					
Φ80					
Φ100	B(100~800)	166	105	100	
Φ125					
Φ150					
Φ200					
Φ250					
Φ300	C(400~2000)	266	156	140	
Φ350					
Φ400					
Φ450					

(NOTE) The mentioned size and scale can be altered to improve the quality performance and capacity of the product without any notice.

■ SRH-B TYPE Dimension & Selection Guide

SRP	A	C	H
100X2EA	250	150	48
200X2EA	250	150	
100X2EA	250	150	
200X2EA	250	150	
200X2EA	250	150	
200X2EA	250	150	
400X2EA	350	150	
600X2EA	350	150	
600~800X2EA	350	150	
1000~1500X2EA	350	200	

(NOTE) The mentioned size and scale can be altered to improve the quality performance and capacity of the product without any notice.